




CS-8881MBFT

Electronic Direct Drive, Single Needle, Needle Feed & Top/Bottom Roller Feed, Postbed Sewing Machine. (Stepping Motor Control Type Of Feeding) (With Automatic Undertrimming & Automatic Backtacking & Automatic Roller Presser Lifting)

The Stepping motor control type of feeding (needle feed & top/bottom roller feed), no matter in high speed or low-speed operation, the machine could obtain stable stitches, ensured the precise backtacking overlap.

- The button switch with the immobile function,utilizing the small round button B, could change the function of square button A to touch-control switch C,easy operation.
- The newly designed undertrimming mechanism,applied with the close up type of lubrication,could decrease the wearout of parts & increase the working efficiency.
- The low-tension sewing can be performed & the reliable thread trimming is ensured,leading to further improved seam quality.
- All electric control,no need for any compressed air.
- The feeding volume (forward & backward) is 5mm,differential ratio of top feed is ± 1 mm,with minimum oil lubrication.

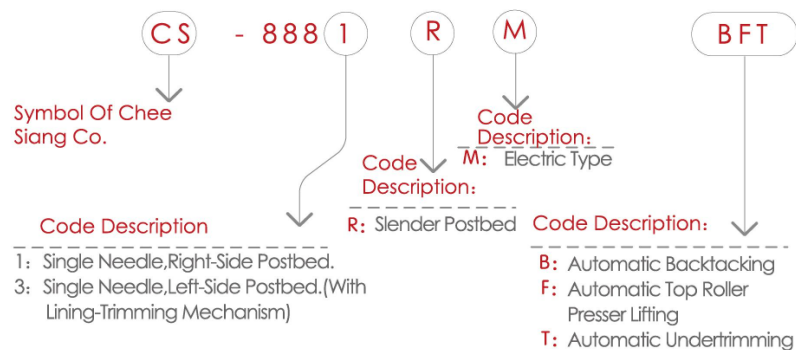

SPECIFICATIONS:

Model No.	 Max. Sewing Speed S.P.M.	 Lifting Of Top Roller Presser (Knee) mm	 Max. Stitch Length mm	 Needle System	 Needle Bar Stroke mm	 Differential Ratio	Operating Space mm
CS-8881MB	3000	12.5	0.8-5	DP×5(#18) (#14~#22)	40	±1mm	285×300
CS-8881MBFT	3000	12.5	0.8-5		40	±1mm	285×300
CS-8881R-MB	3000	12.5	0.8-5		40	±1mm	285×300
CS-8881R-MBFT	3000	12.5	0.8-5	DP×5(#18) (#14~#22)	40	±1mm	285×300
CS-8883MB	3000	12.5	0.8-5		40	±1mm	285×300
CS-8883MBFT	3000	12.5	0.8-5		40	±1mm	285×300

CS-8881R-MBFT



Electronic Direct Drive, Single Needle, Needle Feed & Top/Bottom Roller Feed, Postbed Sewing Machine. (Slender Postbed) (Stepping Motor Control Type Of Feeding) (With Automatic Undertrimming & Automatic Backtacking & Automatic Roller Presser Lifting).

CS-8883MBFT



Electronic Direct Drive, Single Needle, Needle Feed & Top/Bottom Roller Feed, Postbed Sewing Machine. (Stepping Motor Control Type Of Feeding) (With Automatic Undertrimming & Automatic Backtacking & Automatic Roller Presser Lifting) (With Lining-Trimming Mechanism).